

Harmony Profile

Not suitable for use with anti-pick mastic



Provided with a choice of Opal or Prismatic diffuser and manufactured with spun aluminium bases and trim in 323mm, 414mm and 498mm diameter; finished as standard in White, Brass, Chrome, Satin Aluminium. Graphite is available as a non standard colour option.

Provided with energy saving 16w, 28w, 38w, 2x18w or 2x 26w lamp options the range offers a multitude of operating modes including:

Standard Switch Start, Switch Start Power factor correction (PFC), High Frequency (HF), 3 hour emergency and High Frequency 3 hour emergency.


Not suitable for use with anti pickmastic due to lifetime maintenance.

- Vandal resistant.
- Tamper proof fixings (Chrome or White).
- Spun Aluminium base and trim.
- Integral microwave sensor option (internal use only).
- Corridor function.
- Not suitable for use with anti-pick mastic.



Harmony Profile 323mm

Size	A	B
323mm	87	323
414mm	105	414
498mm	122	490

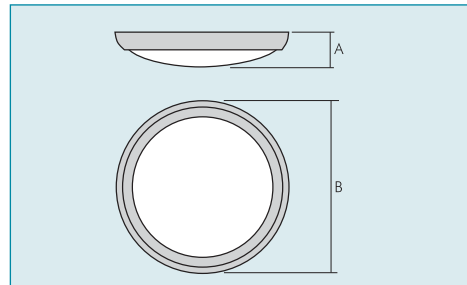

Description	16W	16W HF
White Opal	HP3/WL716	HP3/WL716E
White Prismatic	HP3/WP716	HP3/WP716E
Chrome Opal	HP3/HL716	HP3/HL716E
Chrome Prismatic	HP3/HP716	HP3/HP716E
Satin Aluminium Opal	HP3/FL716	HP3/FL716E
Satin Aluminium Prismatic	HP3/FP716	HP3/FP716E
Graphite Opal	HP3/GL716	HP3/GL716E
Graphite Prismatic	HP3/GP716	HP3/GP716E

Harmony Profile



Lamp Types

- 16W 2D 2-Pin. 2700K. GR8 Cap.
- PLEASE NOTE – 3500K lamps available on request.
PLEASE NOTE – High frequency versions are all 4-Pin.

Materials

- Body: Spun aluminium in white / chrome / brass / satin aluminium. Graphite is available as a non standard finish with other colours available on request.
- Diffuser: Vandal resistant polycarbonate in opal or prismatic, with self-extinguishing fire properties.
- Tamper proof fixings.

Installation

- Wall or ceiling mount.
- Not suitable for use with anti-pick mastic.

Standards

- IP20.
- 'F' Mark.
- CE.
- BSEN60598-2-1.
- Class I.



Options

- Switch start.
- Switch start with PFC.
- High frequency.
- Fused connector block.