

# Harmony Profile

Not suitable for use with anti-pick mastic



Provided with a choice of Opal or Prismatic diffuser and manufactured with spun aluminium bases and trim in 323mm, 414mm and 498mm diameter; finished as standard in White, Brass, Chrome, Satin Aluminium. Graphite is available as a non standard colour option.

Provided with energy saving 16w, 28w, 38w, 2x18w or 2x 26w lamp options the range offers a multitude of operating modes including:

Standard Switch Start, Switch Start Power factor correction (PFC), High Frequency (HF), 3 hour emergency and High Frequency 3 hour emergency.

Not suitable for use with anti pickmastic due to lifetime maintenance.


- Vandal resistant.
- Tamper proof fixings (Chrome or White).
- Spun Aluminium base and trim.
- Integral microwave sensor option (internal use only).
- Corridor function.
- Not suitable for use with anti-pick mastic.





## Harmony Profile 498mm

Size	A	B
323mm	87	323
414mm	105	414
498mm	122	490

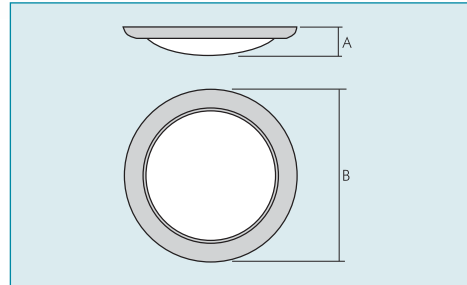

Description	28W HF	28W M3	28W HF M3
White Opal	HP52/WL728E	HP52/WL728M	HP52/WL728EM
White Prismatic	HP52/WP728E	HP52/WP728M	HP52/WP728EM
Chrome Opal	HP52/HL728E	HP52/HL728M	HP52/HL728EM
Chrome Prismatic	HP52/HP728E	HP52/HP728M	HP52/HP728EM
Satin Aluminium Opal	HP52/FL728E	HP52/FL728M	HP52/FL728EM
Satin Aluminium Prismatic	HP52/FP728E	HP52/FP728M	HP52/FP728EM
Graphite Opal	HP52/GL728E	HP52/GL728M	HP52/GL728EM
Graphite Prismatic	HP52/GP728E	HP52/GP728M	HP52/GP728EM

Description	38W HF	38W M3	38W HF M3	55W HF
White Opal	HP52/WL738E	HP52/WL738M	HP52/WL738EM	HP52/WL755E
White Prismatic	HP52/WP738E	HP52/WP738M	HP52/WP738EM	HP52/WP755E
Chrome Opal	HP52/HL738E	HP52/HL738M	HP52/HL738EM	HP52/HL755E
Chrome Prismatic	HP52/HP738E	HP52/HP738M	HP52/HP738EM	HP52/HP755E
Satin Aluminium Opal	HP52/FL738E	HP52/FL738M	HP52/FL738EM	HP52/FL755E
Satin Aluminium Prismatic	HP52/FP738E	HP52/FP738M	HP52/FP738EM	HP52/FP755E
Graphite Opal	HP52/GL738E	HP52/GL738M	HP52/GL738EM	HP52/GL755E
Graphite Prismatic	HP52/GP738E	HP52/GP738M	HP52/GP738EM	HP52/GP755E

Description	2 X 18 HF	2 X 18 HF M3	2 X 26W HF
White Opal	HP52/WL2X18E	HP52/WL2X18EM	HP52/WL2X26E
White Prismatic	HP52/WP2X18E	HP52/WP2X18EM	HP52/WP2X26E
Chrome Opal	HP52/HL2X18E	HP52/HL2X18EM	HP52/HL2X26E
Chrome Prismatic	HP52/HP2X18E	HP52/HP2X18EM	HP52/HP2X26E
Satin Aluminium Opal	HP52/FL2X18E	HP52/FL2X18EM	HP52/FL2X26E
Satin Aluminium Prismatic	HP52/FP2X18E	HP52/FP2X18EM	HP52/FP2X26E
Graphite Opal	HP52/GL2X18E	HP52/GL2X18EM	HP52/GL2X26E
Graphite Prismatic	HP52/GP2X18E	HP52/GP2X18EM	HP52/GP2X26E

## Harmony Profile



### Lamp Types

- 28W / 38W 2D 4-Pin. 2700K. GR10 Cap.
  - 55W 4-Pin 2700K. GRY10q-3 Cap.
  - 2 x 18W 3500K TC-D 4-Pin G24q-2 Cap.
  - 2 x 26W 3500K TC-D 4-Pin G24q-3 Cap.
- PLEASE NOTE – 3500K lamps available on request.  
PLEASE NOTE – Emergency and high frequency versions are all 4-pin.

### Materials

- Body: Spun aluminium in white / chrome / brass / satin aluminium. Graphite is available as a non standard finish with other colours available on request.
- Diffuser: Vandal resistant polycarbonate in opal or prismatic, with self-extinguishing fire properties.
- Tamper proof fixings.

### Installation

- Wall or ceiling mount.
- Not suitable for use with anti-pick mastic.

### Standards

- IP20 (IP44 available as an option).
- 'F' Mark.
- CE.
- BSEN60598-2-1 & BSEN60598-2-22.
- Class I.



### Options

- Switch start with PFC.
- High frequency.
- High frequency emergency.
- Fused connector block.
- Central battery versions available.
- 28W + 7W night light PFC.
- 38W + 7W night light PFC.
- HF Dimmable 28W & 38W.
- Microwave sensor.
- Corridor function.